


DATE


PROJECT

TYPE

# CTL84X | Xicato Gallery Series Cylinder Track Luminaire

	CTL84X2	CTL84X3
WATTAGE		
Standard CRI	16W	23W
High CRI	19W	N/A
LUMEN OUTPUT <sup>1</sup>	1300Lm	1600Lm
COLOR TEMPERATURE	2700K, 3000K, 3500K, 4000K	
LIGHT ENGINE	Xicato XTM LED module	
CRI		
Standard Series:	CRI 80 min., 83 Typical	
Artist Series:	CRI 98 and R9 $\geq$ 90	
Vibrant Series:	Both standard CRI 83 and high CRI 98, 3000K Only	
BEAM	19° Spot, 23° Medium, 41° Flood, 56° Wide Flood, Wall Wash	
SYSTEM RATING	50,000 Hours @ 70% Lumen Maintenance	
DRIVER INPUT WATTAGE		
Standard CRI	16W	23W
High CRI	19W	N/A
DRIVER INPUT VOLTAGE	120V, 50/60Hz	
DIMMING TYPE	Incandescent (Forward Phase), ELV (Reverse Phase)	
COMPATIBILITY	CTL Units are compatible with ConTech Lighting LT/LT2 Single Circuit/Two Circuit Track Systems and Luxbeam Track Systems, as well as Juno <sup>®2</sup> Lighting Trac-Master <sup>™</sup> Systems HTL Units are compatible with Halo <sup>3</sup> Power-Trac and Lazer Track Systems LTL Units are compatible with Lightolier <sup>4</sup> Lytespan <sup>®</sup> Systems	
 LISTING	cCSAus Certified to UL Standards Suitable for Dry Locations ENERGY STAR <sup>®</sup> Certified for all variations except Wall Wash and High CRI (98+) options	
WARRANTY	Five (5) year replacement after date of purchase	

1. Lumen values are approximate, see photometric test results
2. Juno is a registered trademark of Juno Lighting
3. Halo is a registered trademark of Cooper Lighting
4. Lightolier is a registered trademark of Philips Lighting

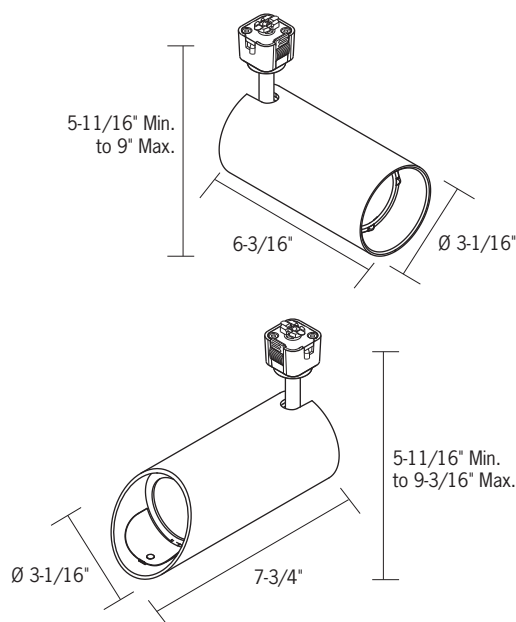

For ordering information, see page 2

DATE

PROJECT

TYPE

# CTL84X | Xicato Gallery Series Cylinder Track Luminaire

## Ordering Information

Example Order: CTL84X2M3D - P FA-84-B LF16SL 60MM

Track System	Luminaire	Beam	Color Temp/CRI	Driver Option	Finish
CTL - ConTech	<b>84X2</b> <sup>1</sup> - 16W 1300Lm	<b>S</b> - 19° Spot	<b>Standard Series</b> 83 (80min) CRI	<b>D</b> - Dimming	<b>B</b> - Black
HTL - Halo	<b>84X3</b> <sup>2</sup> - 23W 1600Lm	<b>M</b> - 23° Medium	<b>Artist Series</b> High CRI 98		<b>P</b> - White
LTL - Lightolier		<b>F</b> - 41° Flood	<b>27</b> - 2700K		<b>S</b> - Silver
		<b>W</b> - 56° Wide Flood	<b>3</b> - 3000K		
		<b>WW</b> - Wall Wash Includes Angled Housing and Wall Wash Kicker Accessory	<b>35</b> - 3500K		
			<b>4</b> - 4000K		
			<b>Vibrant Series</b> 83 (80min) CRI		
			<b>3V</b> - 3000K		
			<b>27C</b> <sup>3</sup> - 2700K		
			<b>3C</b> <sup>3</sup> - 3000K		
			<b>35C</b> <sup>3</sup> - 3500K		
			<b>4C</b> <sup>3</sup> - 4000K		
			<b>Vibrant Series</b> High CRI 98		
			<b>3VC</b> <sup>3</sup> - 3000K		

1. X2 High CRI consumes 19W  
2. 98CRI is not available on the X3 Series  
3. Not available on the X3 Series


## Accessory Ordering Information



**Accessory Holder**  
2-3/4" Dia., 3/8" D  
Accepts up to two (2) LF16 60MM Lenses or FA-16 60MM Louvers. Black finish.



**Snoot**  
2-3/4" Dia., 1-3/8" D  
Snoot extends 1" from face of fixture. Will accept up to two (2) LF16\_60MM lenses or FA-16 60MM louvers. For White (-P) and Silver (-S) finishes, the inside surface is black.




**Barn Doors**  
Barn doors extend 2-3/4" max. from face of fixture. Will accept up to two (2) LF16 60MM Lenses or FA-16 60MM Louvers. Black finish. Width: 3-1/2" to 7-3/4"

FA-84 - Black Accessory Holder

FA-85 - Snoot

**Finish**  
**B** - Black  
**P** - White  
**S** - Silver

BD84-B - Black Barn Doors



**Honeycomb Louver**  
2-3/8" Dia.  
Requires FA-84 Accessory Holder, FA-85 Snoot or BD84 Barn Doors. Black finish.



**Tempered Glass Lenses**  
2-3/8" Dia.  
Requires FA-84 Accessory Holder, FA-85 Snoot or BD84 Barn Doors. See legend for available colors and patterns.

## XSA Series Replacement Optics

Optics can be easily changed in the field for optimal flexibility

FA-16 60MM - Black Honeycomb Louver

LF16-\*\* 60MM - Tempered Glass Lenses

### \*\* Available Color/Patterns

-73 (Spread Lens), -LS (Linear Spread Lens),  
-SL (Soft Light), -SOL (Solite), -UV (Optivex UV Filter),  
-A (Amber), -B (Blue), -CL (Clear), -DPE (Dichroic Peach),  
-G (Green), -LB (Light Blue), -R (Red),  
-RO (Rose), -Y (Yellow)

**XSA-156** - Spot Replacement Optic  
**XSA-262** - Medium Replacement Optic  
**XSA-264** - Flood Replacement Optic  
**XSA-259** - Wide Flood Replacement Optic

DATE

PROJECT

TYPE

# CTL84X | Xicato Gallery Series Cylinder Track Luminaire

## Product Details

### Construction

- Luminaire designed for gallery, museum or retail applications
- Constructed of die-cast aluminum, the cylindrical body provides thermal management
- Lockable, precision aiming adjustment: 360°+ aiming horizontal rotation, 90° vertical rotation
- Integral ON/OFF switch and track polarity indicator are standard
- Fixture weight: 2LBS
- Can accept up to (2) LF16 60MM Lenses or FA-16 60MM Black Honeycomb Louvers with the FA-84 Accessory Holder, FA-85 Snoot, or BD84 Black Barn Doors, ordered separately

### Performance Summary

- The Standard Series Xicato LED Module is available in 2700K, 3000K, 3500K and 4000K; CRI 80 min., 83 Typical
- In addition to the Xicato Standard Series, the following options are also available:  
Artist Series: Delivering exceptional color rendering for natural color, the artist series provides CRI 98 and R9≥90  
Vibrant Series: For striking color, the vibrant series is available in both standard CRI 83 and high CRI 98. 3000K Only
- Xicato Modules feature extraordinary color consistency within 1x2-step MacAdam ellipse
- Select from 19° Spot, 23° Medium, 41° Flood and 56° Wide Flood beam distributions
- All beams are achieved using specular spun metal reflectors that feature a twist-and-lock attachment method, allowing them to easily be changed in the field
- Also available in a wall wash configuration; providing smooth even illumination on vertical surfaces
- Dimming is standard for all wattage options (120V only), allowing smooth illumination down to 10%. Compatible with most Incandescent (Forward Phase) and ELV (Reverse Phase) dimmers. For dimmer compatibility, refer to Dimming Specifications sheet.

### Fixture Compatibility

- Standard ConTech track luminaires (CTL Units) are cCSAus certified as-is for use with ConTech Lighting LT/LT2 Single Circuit/Two Circuit Track Systems and Luxbeam Track Systems, as well as Juno<sup>®1</sup> Lighting Trac-Master<sup>™</sup> Systems.
- By changing the prefix in the part number, ConTech can install inserts which make our fixtures compatible with other manufacturers. Replace “CTL” with “HTL” for Halo<sup>®2</sup> Power-Trac and Lazer-Track systems, and “LTL” for Lightolier<sup>3</sup> Lytespan<sup>™</sup> systems. For more information, please consult factory.

1. Juno is a registered trademark of Juno Lighting  
2. Halo is a registered trademark of Cooper Lighting  
3. Lightolier is a registered trademark of Philips Lighting

DATE

PROJECT

TYPE



# CTL84X | Xicato Gallery Series Cylinder Track Luminaire

## Photometrics

### CTL84X2S3D

Fixture Delivered Lumens: 1343  
Total Watts@120V: 16.4  
Lumens Per Watt: 81.9  
Center Beam Candle Power: 6188  
Beam Distribution: 19°  
Spacing Criterion: 0.33  
Color Rendering Index (CRI)<sup>1</sup>: 82  
Color Temperature (CCT)<sup>2</sup>: 2931K  
Designed for 50,000 Hour Lamp Life<sup>3</sup>  
LM-63 Test No. 86945



Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIAMETER (FT.)
4'	386.8	1.3
6'	171.9	2.0
8'	96.7	2.6
10'	61.9	3.3
12'	43.0	3.9
14'	31.6	4.6

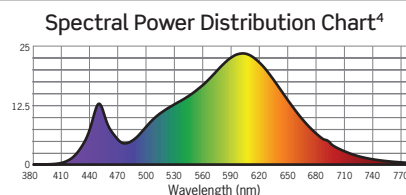

### CTL84X2M3D

Fixture Delivered Lumens: 1294  
Total Watts@120V: 16.4  
Lumens Per Watt: 78.9  
Center Beam Candle Power: 4538  
Beam Distribution: 23°  
Spacing Criterion: 0.39  
Color Rendering Index (CRI)<sup>1</sup>: 82  
Color Temperature (CCT)<sup>2</sup>: 2931K  
Designed for 50,000 Hour Lamp Life<sup>3</sup>  
LM-63 Test No. 86946



Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIAMETER (FT.)
4'	283.6	1.6
6'	126.1	2.3
8'	70.9	3.1
10'	45.4	3.9
12'	31.5	4.7
14'	23.2	5.4

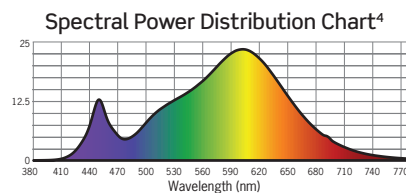

### CTL84X2F3D

Fixture Delivered Lumens: 1226  
Total Watts@120V: 16.4  
Lumens Per Watt: 74.8  
Center Beam Candle Power: 2196  
Beam Distribution: 41°  
Spacing Criterion: 0.66  
Color Rendering Index (CRI)<sup>1</sup>: 82  
Color Temperature (CCT)<sup>2</sup>: 2931K  
Designed for 50,000 Hour Lamp Life<sup>3</sup>  
LM-63 Test No. 86947

Intensity Distribution		
DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIAMETER (FT.)
4'	137.3	2.6
6'	61.0	4.0
8'	34.3	5.3
10'	22.0	6.6
12'	15.3	7.9
14'	11.2	9.3

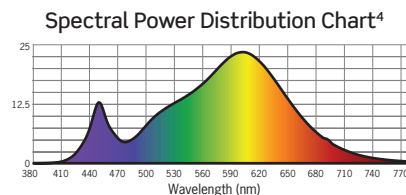

1. Accuracy of rendering colors 2. Color appearance of light source 3. Dependent on surrounding temperatures 4. Colors present within the light source

## Photometric Multiplication Factors

Lumen output values fluctuate based on CCT. To estimate lumen output of the various CCT/CRI options, multiply 3000K (80 CRI min) results by the following:

CCT	Standard 80 CRI	Vibrant 80 CRI	Artist 98 CRI	Vibrant High 98 CRI
2700K	1.0	N/A	0.872	N/A
3000K	N/A	1.0	0.872	0.872
3500K	1.0	N/A	0.872	N/A
4000K	1.0	N/A	0.872	N/A

To calculate X3 values, multiply results by 1.31

DATE

PROJECT

TYPE

# CTL84X | Xicato Gallery Series Cylinder Track Luminaire

## Photometrics


### CTL84X2W3D

Fixture Delivered Lumens: 1325  
Total Watts@120V: 16.4  
Lumens Per Watt: 80.8  
Center Beam Candle Power: 1690  
Beam Distribution: 56°  
Spacing Criterion: 0.85  
Color Rendering Index (CRI)<sup>1</sup>: 82  
Color Temperature (CCT)<sup>2</sup>: 2931K  
Designed for 50,000 Hour Lamp Life<sup>3</sup>  
LM-63 Test No. 86948


#### Intensity Distribution

DISTANCE (FT.)	FOOTCANDLES (FC)	BEAM DIAMETER (FT.)
4'	105.6	3.4
6'	46.9	5.1
8'	26.4	6.8
10'	16.9	8.5
12'	11.7	10.2
14'	8.6	11.8

#### Candela Curve



#### Spectral Power Distribution Chart<sup>4</sup>

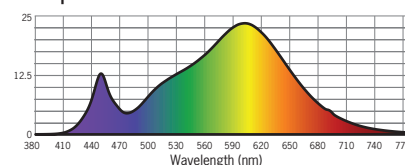

1. Accuracy of rendering colors 2. Color appearance of light source 3. Dependent on surrounding temperatures 4. Colors present within the light source

## Photometric Multiplication Factors

Lumen output values fluctuate based on CCT. To estimate lumen output of the various CCT/CRI options, multiply 3000K (80 CRI min) results by the following:

CCT	Standard 80 CRI	Vibrant 80 CRI	Artist 98 CRI	Vibrant High 98 CRI
2700K	1.0	N/A	0.872	N/A
3000K	N/A	1.0	0.872	0.872
3500K	1.0	N/A	0.872	N/A
4000K	1.0	N/A	0.872	N/A

To calculate X3 values, multiply results by 1.31


DATE

PROJECT

TYPE

## DIMMING SPECIFICATIONS | Gallery Series Track Luminaires: CTL84C, CTL84X

- Incandescent 120VAC dimmers adjust the light with “forward phase control,” where the dimmer “chops” the forward part of the AC wave to deliver less or more power to the light source. No neutral wire connection required.
- Electronic low voltage 120VAC dimmers adjust the light with “reverse phase control,” where the dimmer “chops” the back part of the AC wave to deliver less or more power to the light source. Neutral wire connection required.

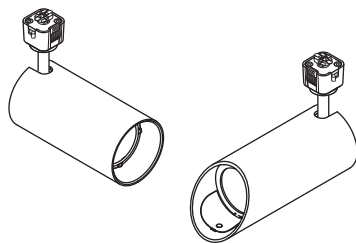

CTL84 Series: “D” Driver Option						
Light Output						
Manufacturer	Model	10W	14W	20W	Xicato 16W	Xicato 23W
Leviton	6161	13% - 100%	10% - 99%	10% - 99%	13% - 99%	12% - 99%
Leviton	IPE04	4% - 100%	3% - 100%	5% - 99%	6% - 99%	6% - 99%
Leviton	IPI06-1LZ	0% - 100%	0% - 99%	1% - 99%	1% - 99%	–
Leviton	VPE06	6% - 100%	5% - 100%	8% - 100%	8% - 100%	9% - 95%
Leviton	6633-P	1% - 100%	0% - 100%	–	3% - 100%	2% - 99%
Leviton	6683-IW	2% - 100%	2% - 100%	4% - 100%	13% - 100%	–
Cooper	DAL06P	1% - 100%	0% - 100%	3% - 100%	–	–
Cooper	DLC03P	1% - 100%	0% - 100%	2% - 100%	2% - 100%	2% - 99%
Cooper	SLC03P	0% - 100%	0% - 100%	0% - 100%	1% - 100%	1% - 99%
Lightolier	ZP260QEW	4% - 100%	3% - 99%	4% - 99%	4% - 98%	5% - 98%
Lutron	CT103P	8% - 100%	6% - 99%	6% - 99%	9% - 99%	10% - 99%
Lutron	DVCL-153P	0% - 100%	0% - 99%	0% - 99%	–	–
Lutron	DVELV303P	4% - 99%	3% - 97%	5% - 97%	6% - 96%	6% - 94%
Lutron	FAELV500	8% - 100%	7% - 99%	9% - 99%	10% - 99%	11% - 99%
Lutron	LG600P	–	5% - 99%	5% - 99%	–	8% - 99%
Lutron	MAELV600	8% - 100%	7% - 99%	9% - 99%	10% - 99%	11% - 99%
Lutron	S600P	3% - 100%	1% - 99%	–	–	5% - 99%
Lutron	SELV300P	4% - 98%	3% - 97%	5% - 96%	6% - 95%	7% - 100%
Lutron	TG-600P	10% - 100%	13% - 99%	12% - 99%	16% - 99%	15% - 99%
Lutron	TGCL-153P	2% - 100%	2% - 99%	4% - 99%	–	–

### Notes

1. Testing was performed with a single fixture connected to dimmer.
2. Testing has been performed on these dimmers, but this does not imply any warranty of compatibility.
3. Dimming performance can be influenced by different loads, as well as variations in dimmer switches within the same model.
4. Dimmer maximum load rating with LED may differ from published traditional source dimmer ratings. Consult manufacturer for maximum dimmer information.
5. Consult factory for additional dimming information.