

EXREM

Compact LED Exit Sign with Battery Back-up

Specifications/Features

Housing

Injection-molded thermoplastic housing.
 UL 94V-0 flame rating.
 Innovative, snap-together design allows for fast installation.
 Replaceable directional chevron inserts are easily removed and reinserted.
 Letters are 6" in height with a 3/4" stroke.
 Single or double face configuration.
 LED Indicator light and test switch.

Mounting

Universal (wall, side or ceiling) mounting.
 Simple twist and lock action tightly secures housing to canopy.

Electrical



120/277 VAC dual voltage operation; 60Hz, 0.023A.
 Low energy consumption: 2.0 watts @ 120V.
 Nickel-Cadmium battery delivers more than 90 minutes of emergency power.
 (Unitech battery, part # AA300 or equal, rated 300mAh, 2.4V)
 After 90 minutes discharge, the battery needs 24 hours to recharge to full capacity.
 Low voltage battery disconnection prevents deep discharge damage to the battery.
 Expected LED life of up to 10 years.

Warranty

This fixture is covered by ConTech's full one (1) year replacement guarantee after date of purchase.

Listing

ULus listed. Suitable for damp locations.
 Meets UL924 and NFPA101.
 For use in 10°C (min) - 40°C (max) ambient temperature.

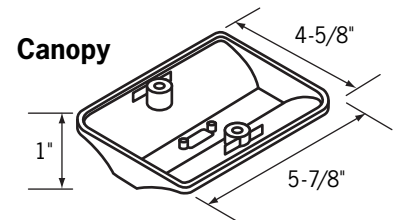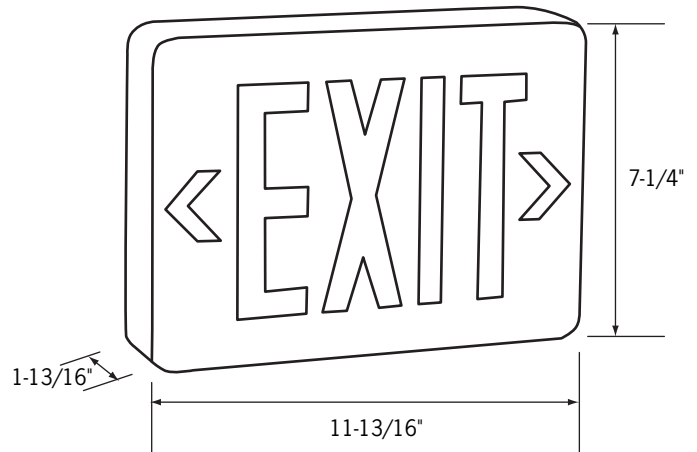

Ordering Information

Example Order: -

Fixture

EXREM - Red LED Exit Sign

Finish

B - Black Housing
P - White Housing