

DATE


PROJECT


TYPE

ETL18 SERIES | Stealth Wall Lighter Luminaires with 0-10V Dimming Track System Adapter



FOR USE ON EXISTING 0-10V DIMMING TRACK (EUTRAC) INSTALLATIONS ONLY

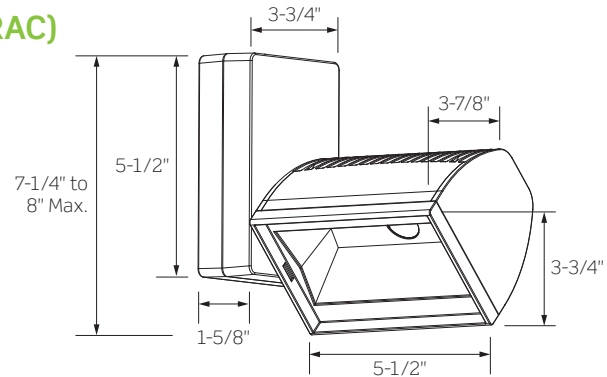

	ETL189	ETL180	ETL181	ETL182	ETL183	ETL184
WATTAGE	16W	22W	31W	36W	43W	47W
LUMEN OUTPUT ¹	2200Lm	3000Lm	4100Lm	4700Lm	5400Lm	5900Lm
COLOR TEMPERATURE	2700K / 3000K / 3500K / 4000K					
CRI	83 (80min) / 90+					
DRIVER INPUT WATTAGE	16W	22W	31W	36W	43W	47W
DRIVER INPUT VOLTAGE	120V - 277V, 50/60Hz					
DIMMING TYPE	Incandescent, Forward Phase, TRIAC					
 LISTINGS	cCSAus Certified to UL Standards on Base Models Suitable for Dry Locations Declare SM Compliant					
WARRANTY	Five (5) year replacement after date of purchase					
SYSTEM RATING	50,000 Hours @ 70% Lumen Maintenance					

1. Approximate lumen output based on 3000K performance; see photometric test results for additional information

ORDERING INFORMATION

Example Order: - -

Luminaire	Orientation	Color Temp/CRI	Dimming	Finish	Eutrac Adapter	Data Bus
ETL189 - 16W / 2200Lm ETL180 - 22W / 3000Lm ETL181 - 31W / 4100Lm ETL182 - 36W / 4700Lm ETL183 - 43W / 5400Lm ETL184 - 47W / 5900Lm	V - Vertical	83 (80min) CRI 90+ CRI 27 - 2700K 27C - 2700K 3 - 3000K 3C - 3000K 35 - 3500K 35C - 3500K 4 - 4000K 4C - 4000K	D - Dimmable (120V Only)	B - Black P - White S - Silver	- 120V 2C/2N Leave Blank 27 - 277V 2C/2N	DB - Data Bus

DATE

PROJECT

TYPE

ETL18 SERIES | Stealth Wall Lighter Luminaires with 0-10V Dimming Track System Adapter


PRODUCT DETAILS

Construction

- Luminaires must be ordered with the -DB Data Bus Track adapter option for use on the ConTech E2CD 2C/2N 0-10V Dimming Track System
- Cast and finned aluminum heatsink has been thermally engineered to provide optimal heat dissipation ensuring long life and consistent performance
- Lockable, precision aiming adjustment: 360°+ aiming horizontal, 360° vertical rotation
- Integral ON/OFF Switch and Track Polarity Indicator are standard
- Can accept up to two (2) media by using the FA-18 Accessory Holder, FA-48 Snoot, FA-51 Visor or BD18 Barn Doors
- For accessory ordering information, see page 3

Performance Summary

- 2700K, 3000K, 3500K and 4000K Color Temperatures; excellent fixture- to-fixture color consistency within a 3-step MacAdam Ellipse tolerance
- 80 CRI min., 83 typical; high 90+ CRI available
- Smooth, wide beam with excellent uniformity; well suited for any wall lighting application
- Dimming is available in 120V only; optional 0-10V Dimming is available
- ETL18 Luminaires utilize Drivers manufactured by ERP and Lutron; for additional information, consult factory
- For Dimmer compatibility, refer to Dimming Specification sheet

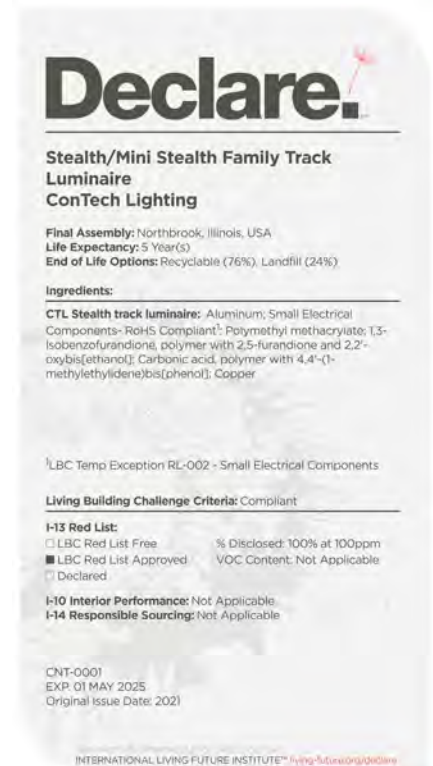

DATE

PROJECT


TYPE

CTL18 SERIES | Stealth Wall Lighter Photometrics

PHOTOMETRICS: CTL184V3D/CTL184H3D

Color Rendering Index (CRI)¹: 80.9
 Color Temperature (CCT)²: 3116K
 Designed for 50,000 Hour Lamp Life³
 LM-79 Test: S19041604

Spectral Power Distribution Chart⁴

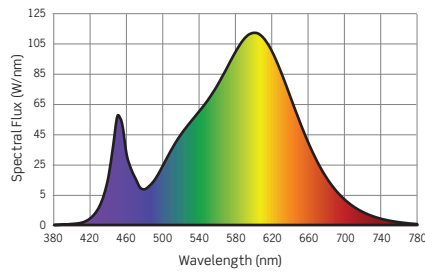

LED SERIES	TOTAL W @ 120V	DELIVERED LMS	LM/WATT	LM-63 TEST
CTL189 16W/SERIES 1	15.8W	2236Lm	141.5	G19032206
CTL180 22W/SERIES 2	21.9W	3049Lm	139.2	G19032204
CTL181 31W/SERIES 3	30.4W	4107Lm	135.1	G19032202
CTL182 36W/SERIES 4	35.8W	4718Lm	131.8	G19032104
CTL183 43W/SERIES 5	42.6W	5418Lm	127.2	G19032102
CTL184 47W/SERIES 6	45.9W	6002Lm	130.6	G19041502

1. Accuracy of Rendering Colors 2. Color Appearance of Light Source 3. Dependent on Surrounding Temperatures 4. Colors Present within the Light Source

PHOTOMETRIC MULTIPLICATION FACTORS

Lumen output values fluctuate based on wattage, CCT and CRI. To estimate lumen output of the various options, multiply CTL184 (3000K, Standard CRI) results using the following tables:

DIMMING MULTIPLIERS		
LED SERIES	STD DIMMING	D3 OPTION
CTL189 16W/SERIES 1	0.37	0.30
CTL180 22W/SERIES 2	0.51	0.43
CTL181 31W/SERIES 3	0.68	0.61
CTL182 36W/SERIES 4	0.79	N/A
CTL183 43W/SERIES 5	0.90	N/A

CCT MULTIPLIERS		
CCT	STD CRI	HIGH CRI
2700K	0.95	0.74
3000K	N/A	0.85
3500K	1.03	0.89
4000K	1.07	0.92

DATE

PROJECT

TYPE

CTL18 SERIES | Stealth Wall Lighter Photometrics

PHOTOMETRICS: CTL184V3D/CTL184H3D

Footcandles on Wall: Track 3 Feet From Wall, 10 FT Mounting Height, Tilted 40 Degrees ▲ is beam center

Distance from Ceiling	Single Unit						Multiple Units								
	0 FT	1 FT	2 FT	3 FT	4 FT	5 FT	4 FT on Center			6 FT on Center			8 FT on Center		
	▲						▲		▲	▲		▲		▲	
1 FT	169	142	91	48	15	4	197	191	201	176	98	175	170	30	173
2 FT	227	193	129	80	38	11	303	265	305	233	166	231	228	78	229
3 FT	184	161	114	79	51	23	289	248	290	201	162	201	187	101	188
4 FT	114	105	80	60	42	27	202	189	203	142	122	142	119	87	119
5 FT	64	59	50	38	29	22	129	132	130	95	80	95	72	60	72
6 FT	37	35	31	25	20	16	89	91	89	64	58	64	49	42	49
7 FT	23	23	21	18	14	12	65	67	66	46	45	46	36	32	37
8 FT	16	16	15	13	11	9	50	51	51	35	35	34	27	25	28
9 FT	12	12	11	10	9	8	38	39	38	26	26	26	21	20	21

Footcandles on Wall: Track 4 Feet From Wall, 10 FT Mounting Height, Tilted 40 Degrees ▲ is beam center

Distance from Ceiling	Single Unit						Multiple Units								
	0 FT	1 FT	2 FT	3 FT	4 FT	5 FT	4 FT on Center			6 FT on Center			8 FT on Center		
	▲						▲		▲	▲		▲		▲	
1 FT	74	67	53	37	21	8	111	111	113	83	77	82	77	42	78
2 FT	125	113	86	62	42	22	212	192	214	145	128	144	130	87	131
3 FT	117	109	88	65	47	31	217	210	218	152	134	151	125	95	125
4 FT	101	94	76	57	44	33	195	195	196	141	121	141	108	90	108
5 FT	71	68	59	47	37	29	161	163	161	116	102	115	86	76	87
6 FT	47	45	40	33	27	22	119	121	120	84	78	84	66	56	67
7 FT	31	30	27	24	20	17	89	90	90	61	60	62	49	43	50
8 FT	21	20	19	17	15	13	67	70	68	47	48	47	37	35	37
9 FT	15	15	13	12	11	10	51	53	54	37	37	37	28	28	28

DATE

PROJECT

TYPE

CTL18 SERIES | Stealth Wall Lighter Photometrics


TM-30 DATA: CTL184V3D/CTL184H3D

ANSI/IES TM-30-18 Color Rendition Report Test No. S21012903




Colors are for visual orientation purposes only

R_f	91
R_g	100
CCT(K)	3111K
D_{uv}	0.0022
u^I	0.2460
v^I	0.5222

Color Vector Graphic

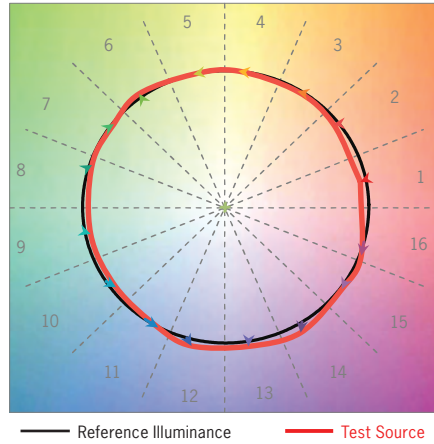

Spectral Power Distribution Comparison

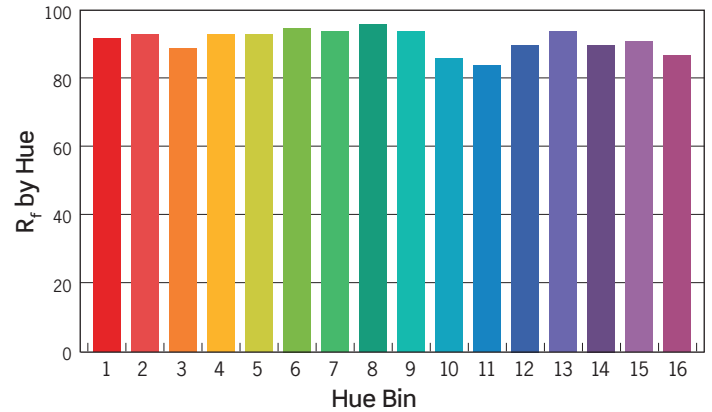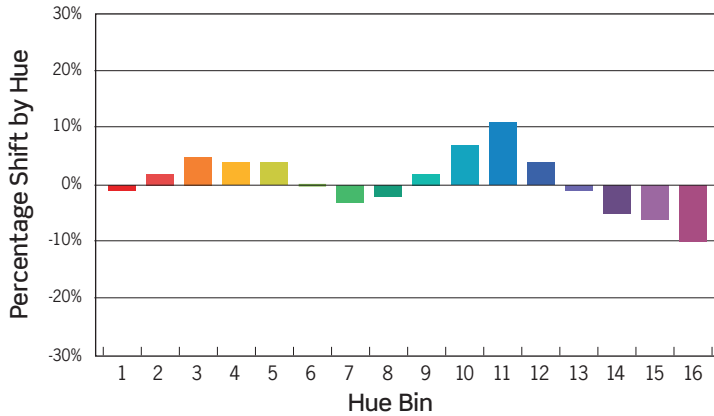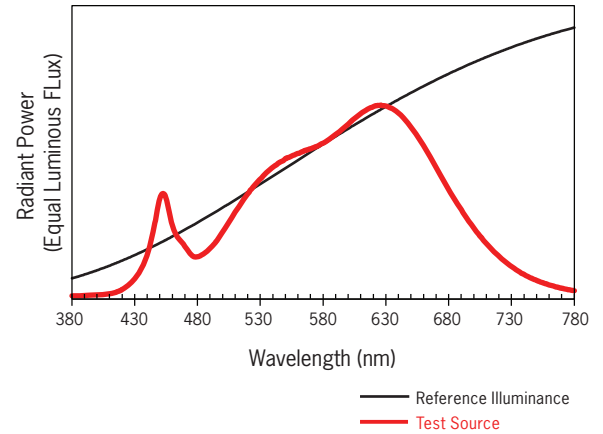


HUE BIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
HUE SHIFT	-1%	2%	5%	4%	4%	0%	-3%	-2%	2%	7%	11%	4%	-1%	-5%	-6%	-10%
R _f VALUE	92	93	89	93	93	95	94	96	94	86	84	90	94	90	91	87

DATE

PROJECT

TYPE

CTL18 SERIES | Stealth Wall Lighter Accessories




Accessory Holder

5-1/4-Inch W x 3-1/2-Inch H x 3/8-Inch D

Accepts up to two (2) LF48 Lenses or FA-52 Louvers.

Accessory	Finish
FA-18 - Accessory Holder	B - Black P - White




Snoot

5-1/4-Inch W x 3-1/2-Inch H x 1-1/8-Inch D

Snoot extends 3/4" from face of fixture. Will accept up to two (2) LF48 lenses or FA-52 louvers. For White (-P) and Silver (-S) finishes, the inside surface is black

Accessory	Finish
FA-48 - Snoot	B - Black P - White S - Silver




Visor

5-1/4-Inch W x 3-1/2-Inch H x 3/8-Inch D

Visor extends 3/4" from face of fixture. Will accept up to two (2) LF48 lenses or FA-52 louvers. For White (-P) and Silver (-S) finishes, the inside surface is black.

Accessory	Finish
FA-51 - Visor	B - Black P - White S - Silver




Barn Doors

5-1/4-Inch W x 3-1/2-Inch H

Barn doors extend 3-inches max. from face of fixture. Will accept up to two (2) LF48 lenses or FA-52 louvers.

Width: 4-1/2" to 10-3/4"
Height: 3-1/2" to 9"

Accessory	Finish
BD18 - Barn Doors	B - Black P - White S - Silver




Honeycomb Louver

4-15/16-Inch W x 2-3/4-Inch H x 1/8-Inch D

Glare control and shielding accessory. Black finish.

Accessory
FA-52 - Honeycomb Louver

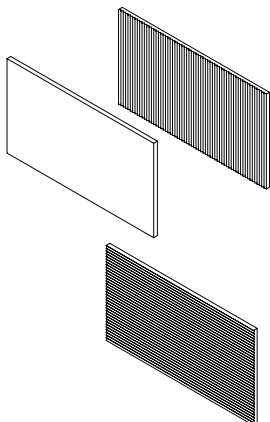

Tempered Glass Lenses

4-15/16-Inch W x 2-3/4-Inch H x 1/8-Inch D

Requires FA-19 Accessory Holder.

Accessory
LF48 - Tempered Glass Lenses

Finish	
73 - Spread Lens	A - Amber
LSH - Linear Spread Lens, Horizontal <i>Elongates beams horizontally</i>	B - Blue
LSV - Linear Spread Lens, Vertical <i>Elongates beams vertically</i>	CL - Clear
SL - Soft Light	DPE - Dichroic Peach
SOL - Solite	G - Green
UV - Optivex UV Filter	LB - Light Blue
	R - Red
	RO - Rose
	Y - Yellow

DATE

PROJECT

TYPE

CTL18/CTL19 SERIES | Stealth Series Track Luminaires: Dimming Specifications

- Incandescent 120V AC Dimmers adjust the light with *Forward Phase Control*, where the Dimmer “chops” the forward part of the AC Wave to deliver less or more power to the light source. No Neutral Wire Connection required.
- Electronic Low Voltage 120V AC Dimmers adjust the light with *Reverse Phase Control*, where the Dimmer “chops” the back part of the AC Wave to deliver less or more power to the light source. Neutral Wire Connection required.
- Lutron HiLume Drivers provide continuous dimming from 1%–100%. For a complete list of compatible Dimmers and Controls, visit www.lutron.com

			TRIAC, ELV, 0-10V DIMMING (MVD Option*)
Manufacturer	Product	Model	Light Output
Leviton	Vizia	VPE06	4%-100%
Leviton	Decora	6673-10W	11%-100%
Lutron	Ariadni	TGCL-153P	0%-100%
Lutron	Diva	DVCL-153P	0%-100%
Lutron	Diva	DVELV303P	3%-100%
Lutron	Skylark	SELV300P	3%-100%
Lutron	Maestro	MAELV600	0%-100%
Lutron	Faedra	FAELV500	7%-100%
Lutron	Skylark C	SCL-153P	0%-100%
Lutron	Maestro C•L	MAELV153M	0%-99%
Lutron	RA2 Select	RRD-6CL	2%-98%

*277V Triac Dimming is not available

NOTES

1. If light is measured, then the dimming range is based on light output. If light is not measured, then the dimming range is based on the percentage of output current.
2. Testing was performed with a single fixture connected to dimmer.
3. Testing has been performed on these dimmers, but this does not imply any warranty of compatibility.
4. Dimming performance can be influenced by different loads, as well as variations in dimmer switches within the same model.
5. Dimmer maximum load rating with LED may differ from published traditional source dimmer ratings. Consult manufacturer for maximum dimmer information.
6. Consult factory for additional dimming information.