


Symphony Low Voltage MiniTrack

Track System Parts and Accessories

Specifications/Features

All electrical connectors are rated for 25A at 12V or 24V.
All components are cULus listed for dry locations. Available Finishes: B (Black), P (White), S (Silver)


Connector Accessories



End Feed Connector/Cover
Power connection point for track sections.
2-1/8" L x 15/16" W x 1/2" H




MLA-1-(B, P, S)



Conduit End Feed
Bottom and end knockout with end cutout in cover. 3-1/8" L x 1-3/8" W x 1-15/16" H




MLA-8-(B, P, S)

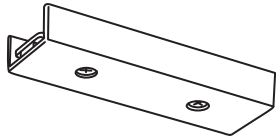

Straight Connector
Joins two (2) sections of track, with cover.
3-3/16" L x 15/16" W x 1/2" H




MLA-2-(B, P, S)

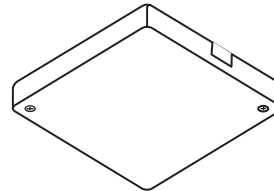

T-Bar Ceiling Canopy
Single/dual feed point (180° access).
Screw holes: 4 5/8" on center for outlet box. 4-11/16" L x 4-11/16" W x 5/8" H




MLA-9-(B, P, S)

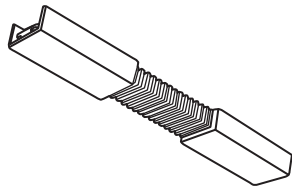

Flexible Connector
Joins two (2) sections of track in horizontal and vertical angles, with covers. Can be used for two (2) feed points or as a non-conductive connector.
6-1/4" L x 15/16" W x 1/2" H




MLA-3-(B, P, S)




End Cap
For replacement or when cutting new sections of track.
3/8" L x 13/16" W x 7/16" H




MLA-11-(B, P, S)




90° Flexible Connector
Allows horizontal track run to be electrically connected to a vertical run.
3-5/8" L x 1" W



MLA-7-(B, P, S)

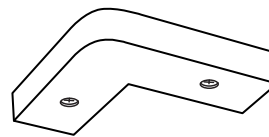


"L" Connector
Right angle connector. Non-polarized use.
2-5/8" L x 15/16" W x 1/2" H
Overall: 2-5/8" x 2-5/8"




MLA-12-(B, P, S)


Mono-Point Accessories

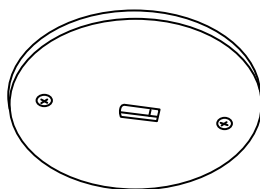

Monopoint Canopy
Mounts to octagonal junction box. Use with remote transformers. 1/4" H x 4-7/8" Dia.
Screw holes: 3 1/2" On center



MLA-18-(B, P, S)



Mini Monopoint Canopy
Remote transformer use. For use in ceilings, cabinets, or vertical surfaces; no visible mounting screws. Standard with 48" of 18 gauge AWM wire with push-in wire connectors. Monopoint is held to material by two heavy gauge mounting springs.
1/8" H x 2-1/2" Dia; Hole size: 2"
Total Depth: 1-15/16"




MLA-19-(B, P, S)

Symphony Low Voltage MiniTrack

Track System Parts and Accessories

Connector Accessories

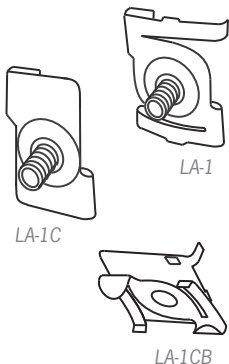

T-Bar Grid Mounting Accessories

Two (2) per 4' track section, Three (3) per 8' track section.




LA-1 - 15/16" Grid Stud Type T-Bar mounting clip

LA-1C - 9/16" Grid T-Bar Clip

LA-1CB - 9/16" Grid Deep Tile T-Bar Clip

LA-1CB SPACER - Spacer for use with LA-1CB

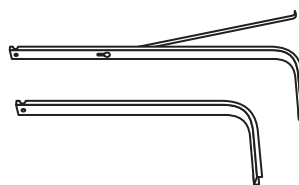

Wall Support Brackets

Designed for wall mounting Symphony track. Includes toggle bolts, washers and screws. 2', 4' and 6' track sections should have 2 support brackets and 8' track sections should have 3 supports. 8 1/2" H x 1 3/4" W



LA2409-(B, P, S) - 24"L


LA3609-(B, P, S) - 36"L with additional support arm




48" Cable Support

For T-Bar Grid Mounting

Support only, non-feed. Includes cable coupler (threaded for 1/4-20 stud), cable holder with screw, cable and T-bar mounting clip with 1/4-20 stud.



MLAC-48T - 48" Cable

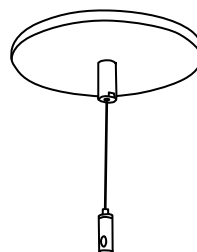

Cable Support Kits


For Junction Box Mounting

Support only, non-feed. Direct mount to junction box. Includes cable coupler (threaded for 1/4-20 stud), cable holder with screw and washer, cable, 1/4-20 hanger bolt, junction box cross bar and 5" ceiling canopy plate.



MLAC-48JB-(B, P) - 48" Cable

MLAC-180JB-(B, P) - 180" Cable

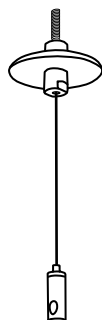

48" Cable Support Kit

For Ceiling Mounting

Support only, non-feed. Direct mount to ceiling. Includes cable coupler, cable holder, cable, toggle bolt assembly, wood screw and 1-7/8" diameter ceiling cover plate.




MLAC-48 - 48" Cable



Cable Supports With Power Feed

For T-Bar Grid and Junction Box Mounting

Support and #10-2 power feed. Junction box and T-Bar grid mounting. Includes cable coupler (threaded for 1/4-20 stud), cable holder with screw and washer, cable, power cable, 1/4-20 hanger bolt, junction box cross bar, two (2) zip ties, strain relief grip and 5" ceiling canopy plate.



MLAC-48PF-(B, P) - 48" Cable

MLAC-180PF-(B, P) - 180" Cable

Finishes: B (Black), P (White), S (Silver)